

RR SERIES

RR2117

2 CHANGE-OVER BIFURCATED CONTACTS, 8 FASTON, DPDT.

TYPE

RR2110 ... V
Relay for Railway applications
2 CO

MAX. CONTACT LOAD

6 A / 250 V AC1
6 A / 30 V DC1

CONTACT

Material	Standard	AgNi + 0,2 μ Au
	Optional	AgNi + 10 μ Au

Rated current / Max. peak current	6 A / 15 A
Rated voltage / Max. switching voltage AC-1	250 V / 250 V
Rated load AC15 (250 V)	350 VA
Min. switching load	5 mA / 5 V
	1 mA / 5 V (10 μ Au)

COIL

Operation range	0,7 x U _N ... 1,25 x U _N
Rated power (AC/DC)	1,07 W
Release voltage	≥ 0,1 x U _N
Coil resistance	±10%

Coil data

VDC	Ω	mA
24	535	45
48	2K	24
72	4K7	15
110	11K3	10

INSULATION (V_{rms}, 1 min)

Contact open	1,5 KV / 850 V
Coil / Contacts	4 KV / 2200 V
Insulation IEC 61810-1	2,5 KV/3
Between contacts	4 KV / 2200 V



SPECIFICATIONS

Ambient temperature	- 40 °C ... + 80 °C
Operation / Release time	10 ms / 15 ms
Protection category	IP40
Electrical life DC / Mechanical life	1·10 ⁵ op / 10·10 ⁶ op (AC) 20·10 ⁶ op (DC)
Weight	35 g

ACCESSORIES

Sockets SQB20D, SQW20X, SQP20X, SQP20F, SQB20I

ORDERING CODE

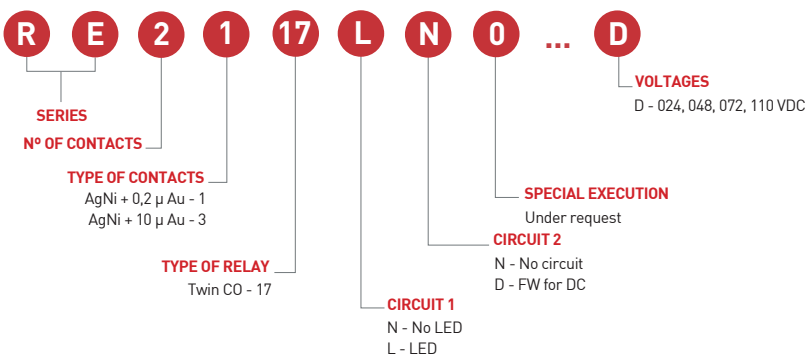

CONNECTION DIAGRAM




FIG. 1 ELECTRICAL LIFE AC LOAD



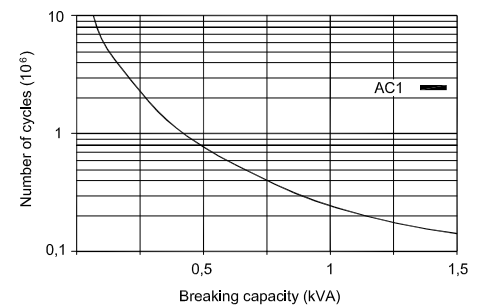


FIG. 2 MAX. DC BREAKING CAPACITY

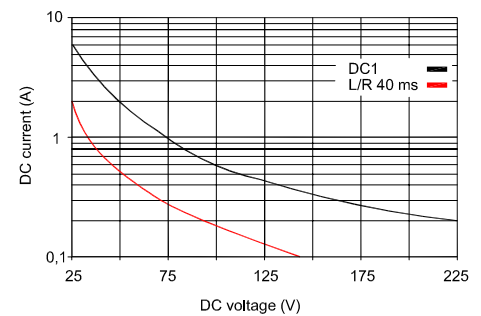

DIMENSIONS mm [inch]

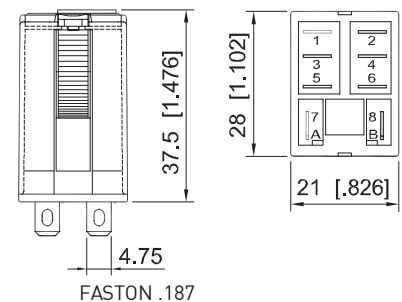

TECHNICAL APPROVALS

