

SF SERIES

SFP10X

1 POLES , PRINTED CIRCUIT



TYPE

SFP10X
Printed circuit socket for 1-pole RF relays

SPECIFICATIONS

Rated load	10 A / 250 V
Insulation	
- Coil / Contacts	5 kV
- All terminals DIN rail	
Cross-section of connecting wire	0,5 x 1 mm
- Single-wire	
- Multi-wire	
Max. screw torque	
Mounting	
Ambient temperature	- 40 ... + 80 °C
Weight	7 g

SOCKET FOR PLUG-IN RELAYS


RF1010, RF1014, RF1410, RF1217, RF1222,
RS1614, RS1714, RS1814, RS1914

ACCESSORIES


Integrated retaining plastic clip AC80A




CONNECTION DIAGRAM



DIMENSIONS mm [inch]

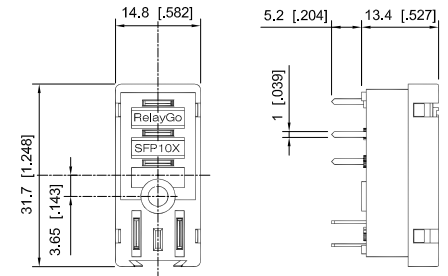

ORDERING CODE

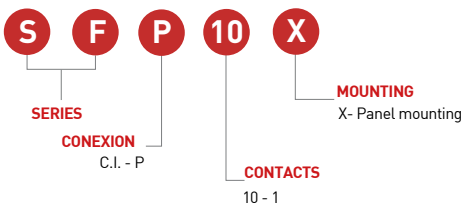

TECHNICAL APPROVALS



In process In process In process
IEC 61810; EN 60947