

SM SERIES

SMT20D

2 POLES, DIN RAIL



TYPE

SMT20D
Socket for 2-pole RM relay

SPECIFICATIONS

Rated load	10 A / 300 V
Insulation	2,5 kV (Test voltage V rms 1 min)
- Coil / Contacts	
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	4 mm ² or 2 x 2,5 mm ²
- Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Mounting	DIN rail TS35 or panel mounting
Ambient temperature	- 40 °C ... + 80 °C
Weight	58 g

SOCKET FOR PLUG-IN RELAYS


RM2010, RM2014, RM2117

ACCESSORIES


Retaining spring, steel	AC30N, Timer series TM - AC31N
Integrated retaining plastic clip	




CONNECTION DIAGRAM

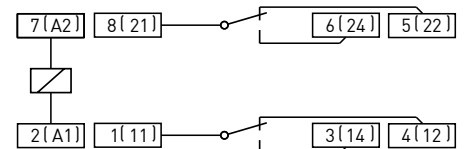

DIMENSIONS mm [inch]

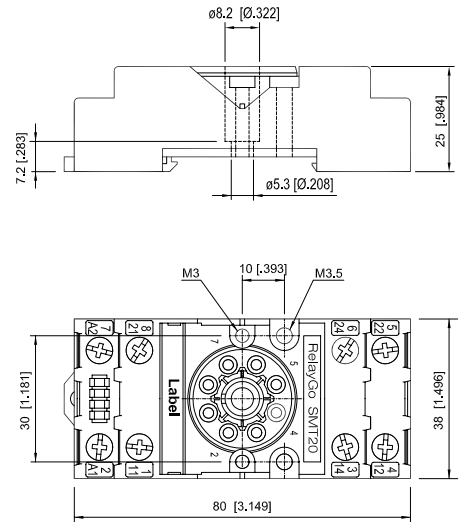

ORDERING CODE

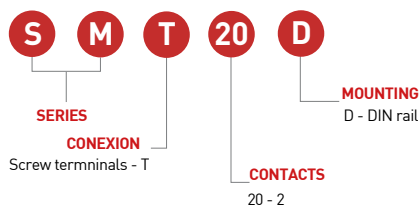

TECHNICAL APPROVALS



In process In process In process
IEC 61810; EN 60947