

# SM SERIES

## SMT30D

3 POLES, DIN RAIL



### TYPE

SMT30D  
Socket for 3-pole RM relay

### SPECIFICATIONS

Rated load	10 A / 250 V
Insulation	2,5 kV (Test voltage V rms 1 min)
- Coil / Contacts	
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	4 mm <sup>2</sup> or 2 x 2,5 mm <sup>2</sup>
- Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Mounting	DIN rail TS35 or panel mounting
Ambient temperature	- 40 °C ... + 80 °C
Weight	69 g

### SOCKET FOR PLUG-IN RELAYS


RM3010, RM3014, RM3117, RM2112, RM3113,  
RM1015, RM1016, RM2019, RR3010

### ACCESSORIES


Retaining spring, steel AC30N, Timer series TM - AC31N  
Integrated retaining plastic clip




### CONNECTION DIAGRAM

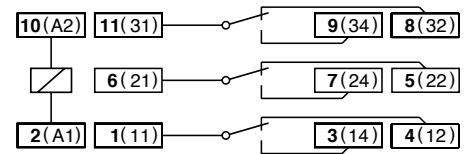

### DIMENSIONS mm [inch]

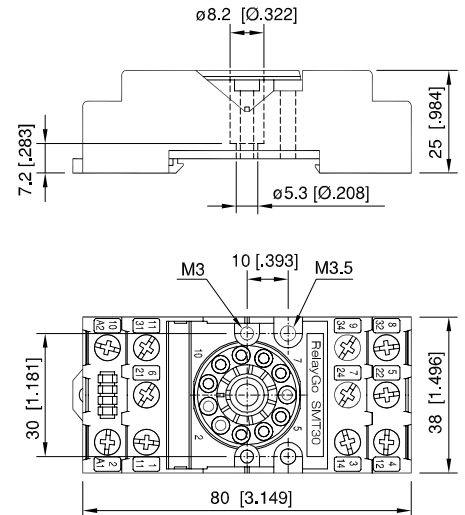

### ORDERING CODE

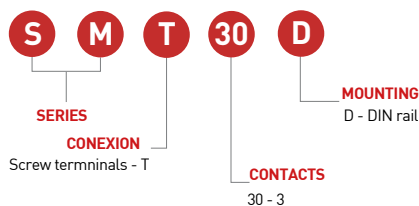

### TECHNICAL APPROVALS



In process In process In process  
IEC 61810; EN 60947