

SM SERIES

SMT40D

4 POLES, DIN RAIL



TYPE

SMT40D
Socket for 4-pole RM relay

SPECIFICATIONS

Rated load 10 A / 300 V
Insulation 2,5 kV (Test voltage V rms 1 min)
- Coil / Contacts
- All terminals DIN rail
Cross-section of connecting wire
- Single-wire 4 mm² or 2 x 2,5 mm²
- Multi-wire 22 - 14 AWG
Max. screw torque 1,2 Nm
Mounting DIN rail TS35 or panel mounting
Ambient temperature - 40 °C ... + 80 °C
Weight 80 g

SOCKET FOR PLUG-IN RELAYS


RM4010, RM2015, RM3019, RR4010

ACCESSORIES


Retaining spring AC40N
Integrated retaining plastic clip




CONNECTION DIAGRAM

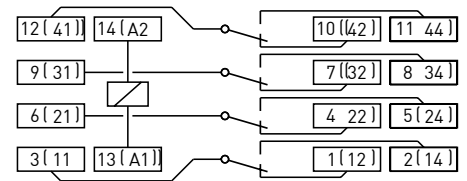

DIMENSIONS mm [inch]

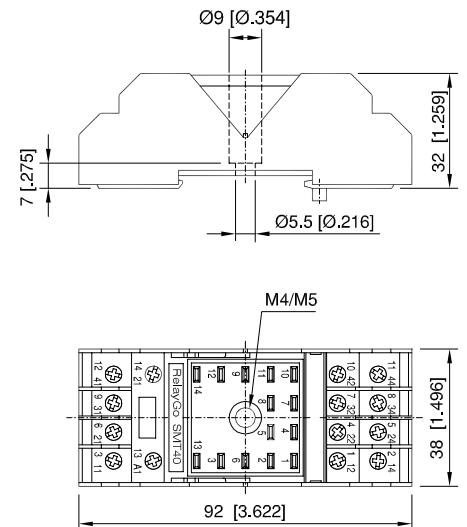

ORDERING CODE

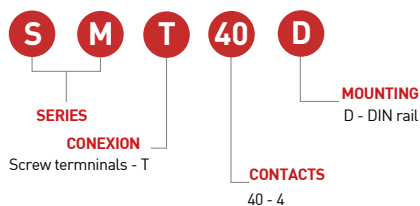

TECHNICAL APPROVALS



In process In process In process In process

IEC 61810; EN 60947