

SM SERIES

SMW20F, SMP20F

2 POLES, SOLDER TERMINALS OR PRINTER CIRCUIT, MOUNTING PANEL OR MOUNTABLE WITH SCREW M3



TYPE

SMW20F	Socket for 2-pole, solder terminals
SMP20F	Socket for 2-pole, printed circuit with flange



SMW20F



SMP20F

SPECIFICATIONS

Rated load	10 A / 300 V
Insulation	2.5 kV
- Coil / Contacts	
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	
- Multi-wire	
Max. screw torque	
Mounting	
Ambient temperature	- 40° C ... + 80° C
Weight	17 g


SOCKET FOR PLUG-IN RELAYS

RM2010, RM2014, RM2117


ACCESSORIES

Retaining spring	AC30M
Integrated retaining plastic clip	


CONNECTION DIAGRAM



DIMENSIONS mm [inch]

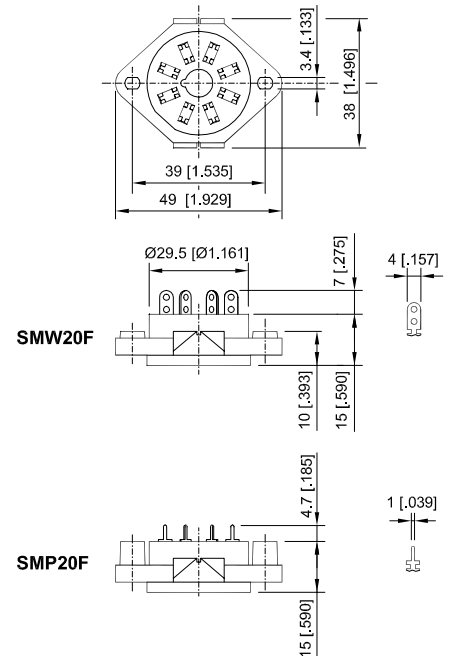

ORDERING CODE

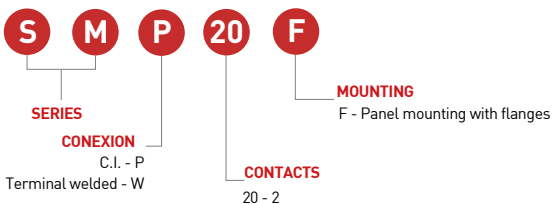

TECHNICAL APPROVALS



In process In process In process In process
IEC 61810; EN 60947