

SM SERIES

SMW30F, SMP30F

3 POLES, SOLDER TERMINALS OR PRINTER CIRCUIT, MOUNTING PANEL OR MOUNTABLE WITH SCREW M3



TYPE

- SMW30F
Socket for 3-pole, solder terminals
- SMP30F
Socket for 3-pole, printed circuit with flange



SMW30F



SMP30F

SPECIFICATIONS

- Rated load: 10 A / 250 V
- Insulation: 2.5 kV
- Coil / Contacts
- All terminals DIN rail
- Cross-section of connecting wire
- Single-wire
- Multi-wire
- Max. screw torque
- Mounting
- Ambient temperature: - 40° C ... + 80° C
- Weight: 17 g


SOCKET FOR PLUG-IN RELAYS

RM3010, RM3014, RM3117, RM2112, RM3113, RM1015, RM1016, RM2019, RR3010


ACCESSORIES

- Retaining spring: AC30M
- Integrated retaining plastic clip


CONNECTION DIAGRAM



DIMENSIONS mm [inch]

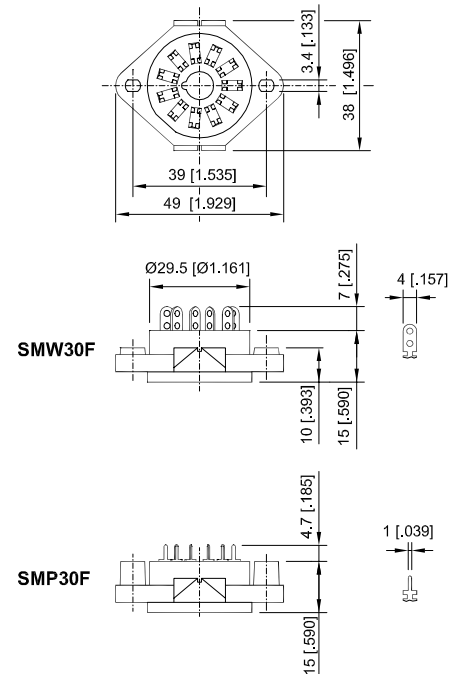

ORDERING CODE

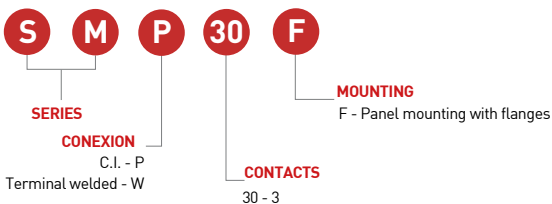

TECHNICAL APPROVALS



IEC 61810; EN 60947