

# SM SERIES

## SMW40F, SMP40X, SMP40F

4 POLES, SOLDER TERMINALS OR PRINTER CIRCUIT, MOUNTING PANEL OR MOUNTABLE WITH SCREW M3



### TYPE

SMW40F	Socket for 4-pole, solder terminals
SMP40F	Socket for 4-pole, printed circuit with flange
SMP40X	Socket for 4-pole, printed circuit

### SPECIFICATIONS


Rated load	10 A/250 V
Insulation	2.5 kV
- Coil / Contacts	
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	
- Multi-wire	
Max. screw torque	
Mounting	
Ambient temperature	- 40° C ... + 80° C
Weight	21 g

### SOCKET FOR PLUG-IN RELAYS


RM4010, RM2015, RM3019, RR4010

### ACCESSORIES


Retaining spring	AC50N
Integrated retaining plastic clip	

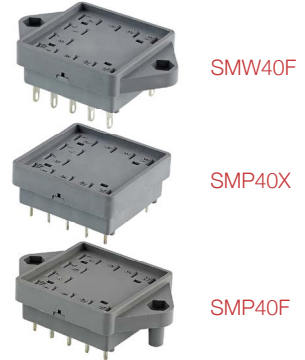


### CONNECTION DIAGRAM



### DIMENSIONS mm [inch]

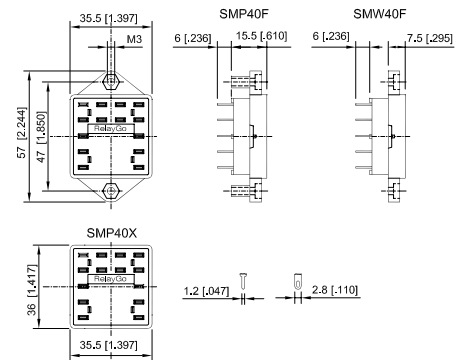

### ORDERING CODE

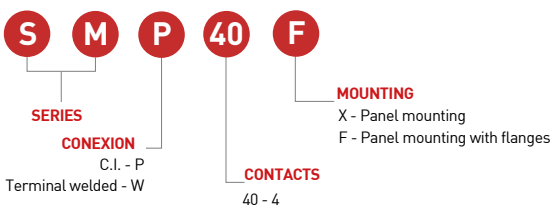

### TECHNICAL APPROVALS



In process In process In process In process

IEC 61810; EN 60947