

SP SERIES

SPT30D

3 POLES, DIN RAIL



TYPE

SPT30D
Socket for 3-pole RP relay

SPECIFICATIONS

Rated load	16 A / 400V
Insulation	4 kV (Test voltage V rms 1 min)
- Coil / Contacts	4 kV
- All terminals DIN rail	4 kV
Cross-section of connecting wire	
- Single-wire	4 mm ² or 2 x 2,5 mm ²
- Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Mounting	DIN rail TS35 or panel mounting
Ambient temperature	- 40 °C ... + 80 °C
Weight	80 g

SOCKET FOR PLUG-IN RELAYS


RP2010, RP3010, RP3014, RP1015, RP1016,
RP2016, RP2019

ACCESSORIES


Retaining spring, steel	AC40N
Integrated retaining plastic clip	




CONNECTION DIAGRAM

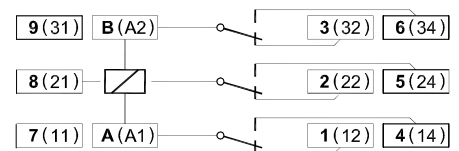

DIMENSIONS mm [inch]

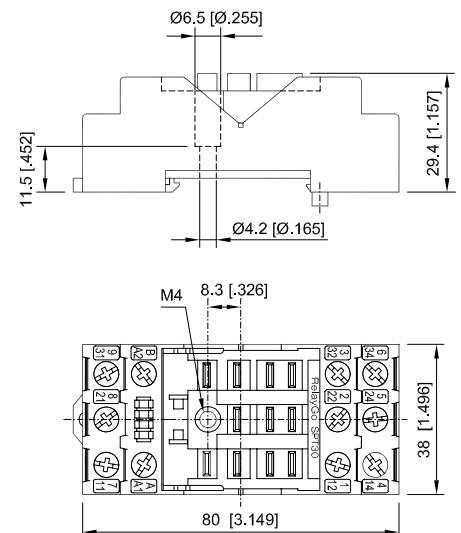

ORDERING CODE

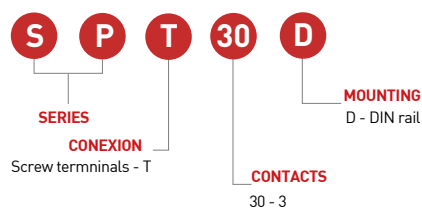

TECHNICAL APPROVALS



IEC 61810; EN 60947