

SQ SERIES

SQR10D

1 POLE, DIN RAIL



TYPE

SQR10D
Socket for 1-pole RQ relays

SPECIFICATIONS


| | |
|----------------------------------|--|
| Rated load | 16 A / 250 V |
| Insulation | Test voltage V rms 1 min |
| - Coil / Contacts | 2,5 kV |
| - All terminals DIN rail | 2,5 kV |
| Cross-section of connecting wire | |
| - Single-wire | 4 mm ² or 2 x 2,5 mm ² |
| - Multi-wire | 22 - 14 AWG |
| Max. screw torque | 1,2 Nm |
| Mounting | DIN rail TS35 or mounting panel |
| Ambient temperature | - 40 ... + 80 °C |
| Weight | 32g |

SOCKET FOR PLUG-IN RELAYS


RQ1010

ACCESSORIES



| | |
|-----------------------------------|-------|
| Integrated retaining plastic clip | AC70A |
| Labelling space | |

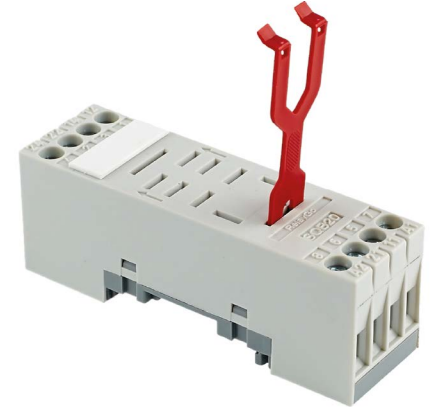


CONNECTION DIAGRAM

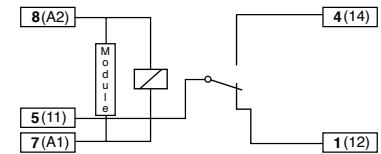

DIMENSIONS mm [inch]

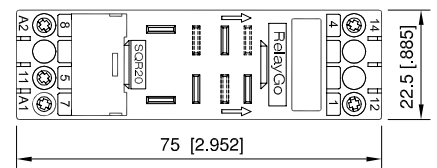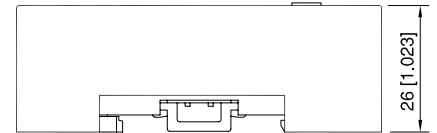

ORDERING CODE

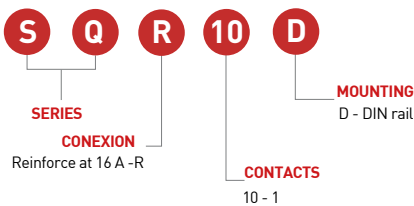

TECHNICAL APPROVALS



IEC 61810; EN 60947