

SQ SERIES

SQW20F, SQP20X, SQP20F

2 POLES, SOLDER TERMINALS OR PRINTER CIRCUIT, MOUNTING PANEL OR MOUNTABLE WITH SCREW M3



TYPE

SQW20F	Socket for 2-pole, solder terminals
SQP20X	Socket for 2-pole, printed circuit
SQP20F	Socket for 2-pole, printed circuit with flange

SPECIFICATIONS


Rated load	10 A / 250 V
Insulation	
- Coil / Contacts	2.5 kV
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	
- Multi-wire	
Max. screw torque	
Mounting	
Ambient temperature	- 40° C ... + 80° C
Weight	12 g

SOCKET FOR PLUG-IN RELAYS


RQ1010, RQ2010, RQ2010NN7, RQ2014, RQ2021, RQ2117, RQ1018, RQ1015

ACCESSORIES


Integrated retaining plastic clip	AC20A
-----------------------------------	-------

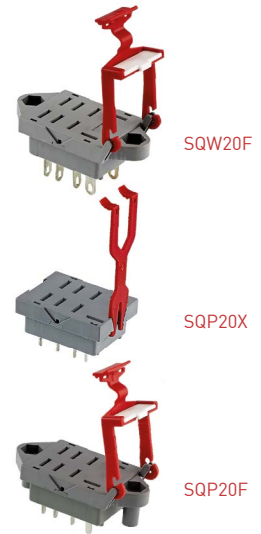


CONNECTION DIAGRAM



DIMENSIONS mm [inch]

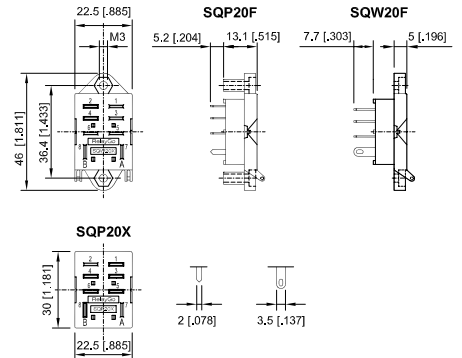

ORDERING CODE

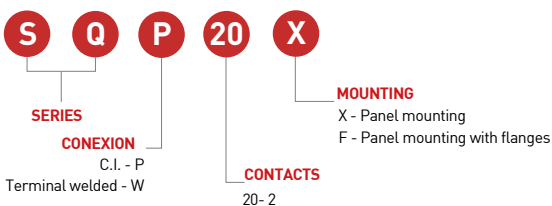

TECHNICAL APPROVALS



In process In process In process In process

IEC 61810; EN 60947