

SQ SERIES

SQW40F, SQP40X, SQP40F

4 POLES, SOLDER TERMINALS OR PRINTER CIRCUIT, MOUNTING PANEL OR MOUNTABLE WITH SCREW M3



TYPE


SQW40F
Socket for 4-pole, solder terminals

SQP40X
Socket for 4-pole, printed circuit

SQP40F
Socket for 4-pole, printed circuit with flange



SQW40F



SQP40X



SQP40F

SPECIFICATIONS

Rated load	6 A / 250 V
Insulation	2.5 kV
- Coil / Contacts	
- All terminals DIN rail	
Cross-section of connecting wire	
- Single-wire	
- Multi-wire	
Max. screw torque	
Mounting	
Ambient temperature	- 40° C ... + 80° C
Weight	12 g


SOCKET FOR PLUG-IN RELAYS

RQ4110, RQ2112, RQ2119


ACCESSORIES

Integrated retaining plastic clip


CONNECTION DIAGRAM



DIMENSIONS mm [inch]

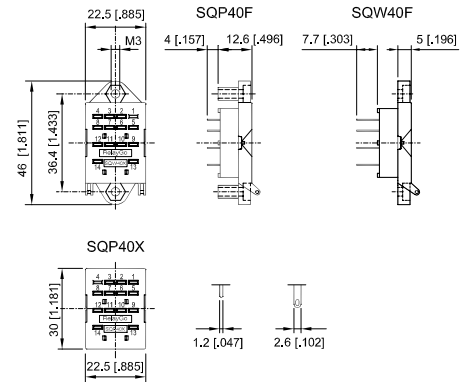

ORDERING CODE

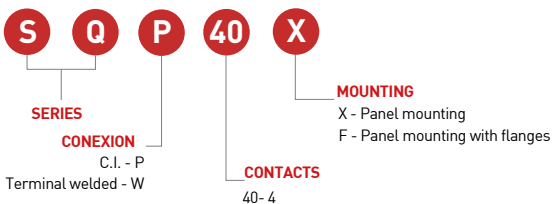

TECHNICAL APPROVALS



In process In process In process In process

IEC 61810; EN 60947