

RQ SERIES

RQ1010

1 CHANGE-OVER CONTACT, 5 FASTON, SPDT.

TYPE

RQ1010 ... V
Miniature Relay
1 CO

MAX. CONTACT LOAD

16 A / 250 V AC1 0,5 A / 110 V DC1
16 A / 30 V DC1 0,2 A / 220 V DC1

CONTACT

Material	Standard	AgNi
	Optional	AgNi + 0,2 μ Au
	Optional	AgNi + 10 μ Au
Rated current / Max. peak current		16 A / 40 A
Rated voltage / Max. switching voltage AC-1		250 V / 400 V
Rated load AC15 (250 V)		750 VA
Min. switching load		10 V / 10 mA 5 V / 5 mA (10 μ Au)

COIL

Operation range	$\leq 0,8 \times U_N - 1,1 \times U_N$
Rated power (AC/DC)	1,2 VA / 1,3 W
Release voltage	$\geq 0,1 \times U_N$
Coil resistance	$\pm 10\%$

Coil data

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	111	108
48	686	25	24	432	55
115	4K3	10,4	48	1K7	28
230	18K6	5,2	110	9K2	12

INSULATION (Vrms, 1 min)

Contact open	1 KV
Coil /Contacts	2,5 KV
Insulation IEC 61810-1	2,5 KV/3
Between contacts	



SPECIFICATIONS

Ambient temperature	- 40 °C ... + 80 °C
Operation / Release time	16 ms / 8 ms
Protection category	IP40
Electrical life DC / Mechanical life	1·10 ⁵ op / 10·10 ⁶ op (AC) 20·10 ⁶ op (DC)
Weight	43 g

ACCESSORIES

Sockets	SQR20D
---------	--------

ORDERING CODE

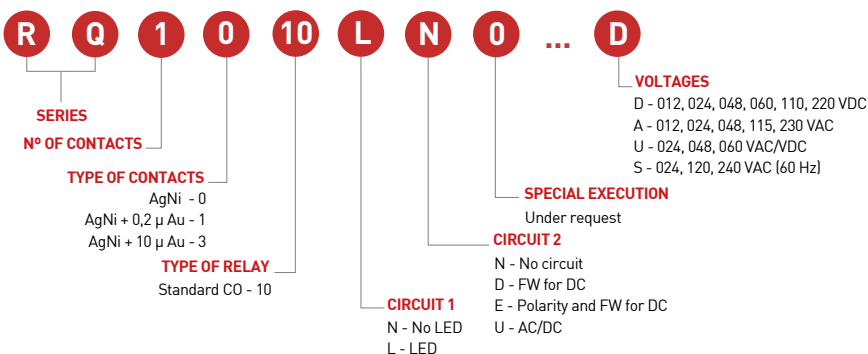

CONNECTION DIAGRAM




FIG. 1 ELECTRICAL LIFE AC LOAD



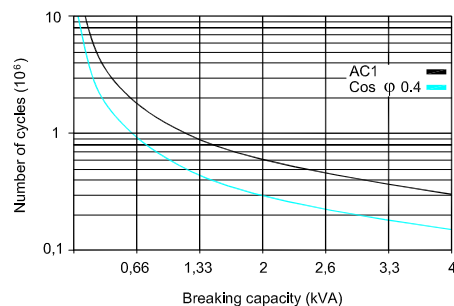


FIG. 2 MAX. DC BREAKING CAPACITY

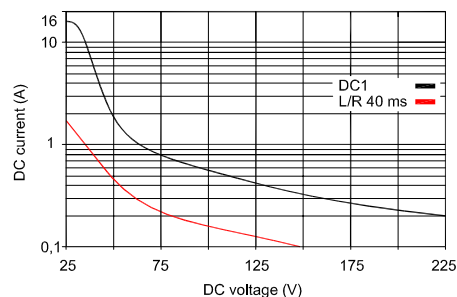

DIMENSIONS mm [inch]

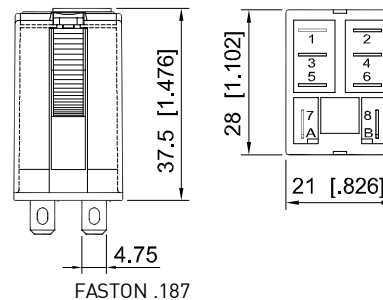

TECHNICAL APPROVALS



IEC 61810; EN 60947